


Battery Operated Single Roller Shade

Scale: NTS

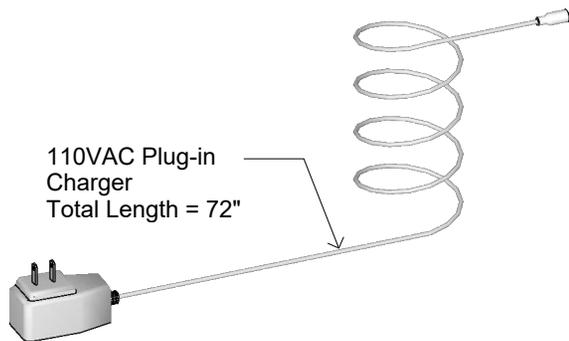

Plug-In Wall Charger (ML-212)

Scale: NTS

ML-350BC Motor
12VDC
3Nm Torque
28 RPM
2600mAh
26 Watts
Charge Time: 6 Hrs
Cycles/Charge: 200

General Installation Notes:

- 1) The ML-350BC motor is a 3Nm battery motor. Designed with an on-board Li-ion battery, this motor is maintained by a low current trickle charge which is to be provided by a small plug-in charger.
- 2) The plug-in charger can be set up to permanently charge the battery, or only be plugged in for a few hours every 6-12 months, or as motor use levels require.
- 3) The ML-350BC is set up for wireless wall mounted and hand-held remote options but also has wired Dry Contact capabilities allowing for a 3rd party system integration. The ML-350BC produces less than 40bDA, powers shades on 2" tubes, and can accommodate a minimum shade width of 31".

ROLLER SHADE OPERATION
See Attached Roller Shade Switch / Remote Option Sheet for Control Availability

ML-350BC Battery Operated Motor w/ RF Control Inside Mounted Single Roller Shade Wiring Diagram

Scale: NTS

By: MJW


Date:

10/15/19
Rev: 01/01/22

CONFIDENTIAL -
All materials disclosed in this document are proprietary to Fabtex, Inc. The holder agrees to maintain it in confidence and must not replicate or reveal this information in any manner.




PRODUCT DISCLAIMER - Fabtex is a manufacturer of commercial products that require installation by a licensed contractor. All information shown is for schematic purposes and to aid coordination amongst trades. All wiring, connections, means and methods is to be performed by others in strict adherence with all federal, state, and local building codes.

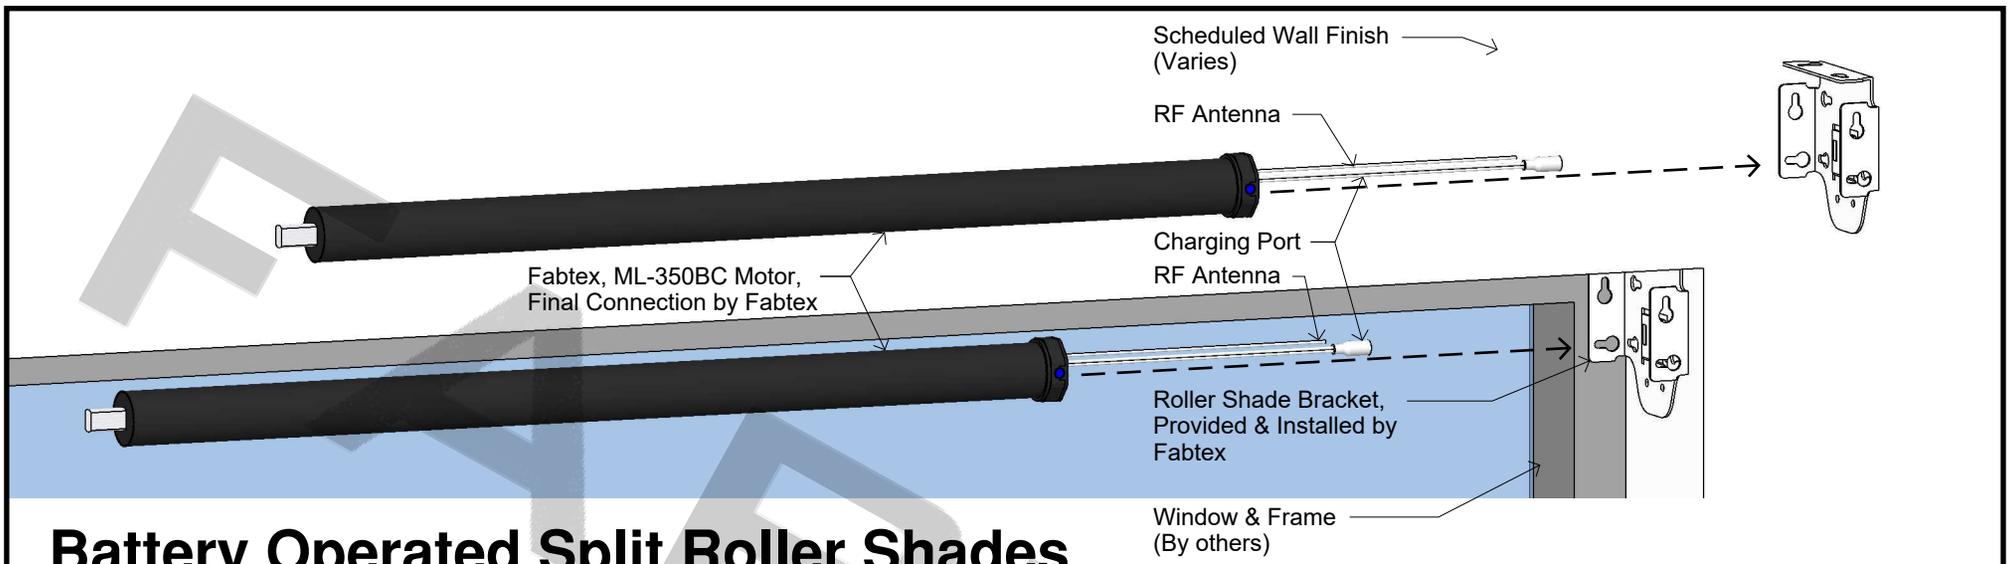

Battery Operated Split Roller Shades

Scale: NTS

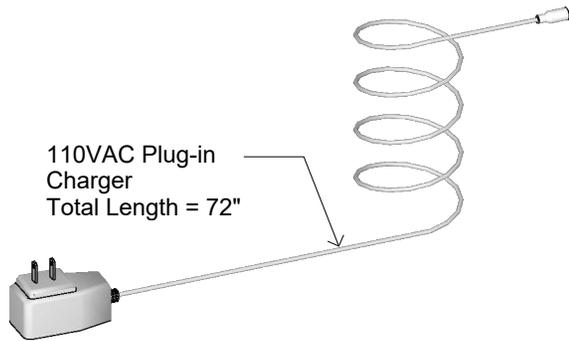

Plug-In Wall Charger (ML-212)

Scale: NTS

ML-350BC Motor
12VDC
3Nm Torque
28 RPM
2600mAh
26 Watts
Charge Time: 6 Hrs
Cycles/Charge: 200

General Installation Notes:

- 1) The ML-350BC motor is a 3Nm battery motor. Designed with an on-board Li-ion battery, this motor is maintained by a low current trickle charge which is to be provided by a small plug-in charger.
- 2) The plug-in charger can be set up to permanently charge the battery, or only be plugged in for a few hours every 6-12 months, or as motor use levels require.
- 3) The ML-350BC is set up for wireless wall mounted and hand-held remote options but also has wired Dry Contact capabilities allowing for a 3rd party system integration. The ML-350BC produces less than 40bDA, powers shades on 2" tubes, and can accommodate a minimum shade width of 31".

ROLLER SHADE OPERATION
See Attached Roller Shade Switch / Remote Option Sheet for Control Availability

ML-350BC Battery Operated Motor w/ RF Control Split Mount (ISM & OSM) Roller Shade Wiring Diagram

Scale: NTS

By: MJW


Date:

10/15/19
Rev: 01/01/22

CONFIDENTIAL -
All materials disclosed in this document are proprietary to Fabtex, Inc. The holder agrees to maintain it in confidence and must not replicate or reveal this information in any manner.




PRODUCT DISCLAIMER - Fabtex is a manufacturer of commercial products that require installation by a licensed contractor. All information shown is for schematic purposes and to aid coordination amongst trades. All wiring, connections, means and methods is to be performed by others in strict adherence with all federal, state, and local building codes.

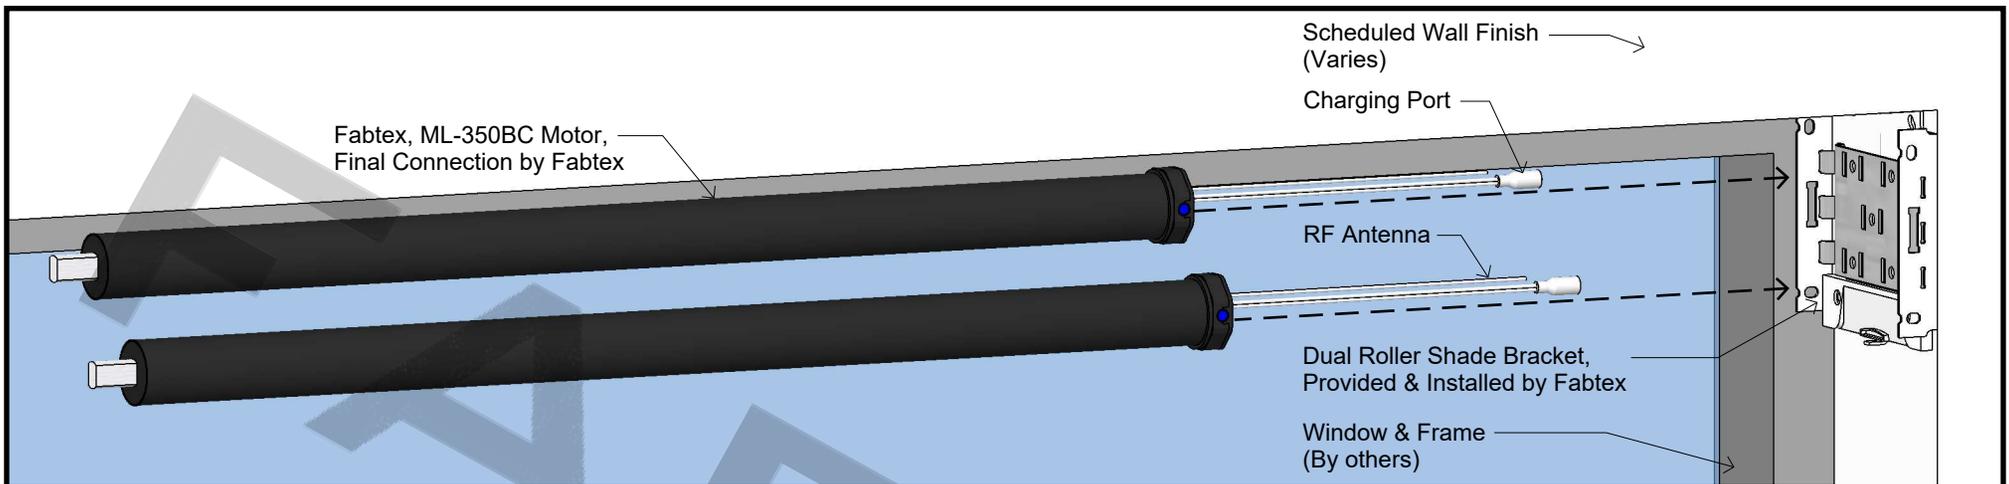

Battery Operated Dual Roller Shade

Scale: NTS

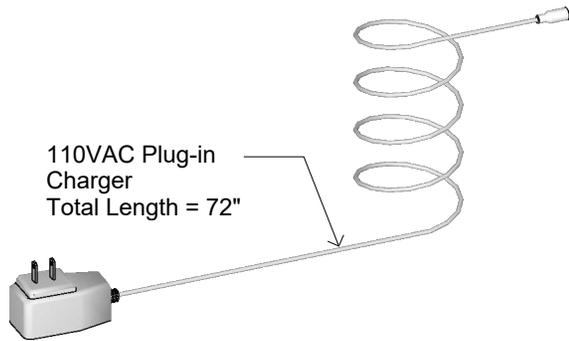

110VAC Plug-in
Charger
Total Length = 72"

Plug-In Wall Charger (ML-212)

Scale: NTS

ML-350BC Motor
12VDC
3Nm Torque
28 RPM
2600mAh
26 Watts
Charge Time: 6 Hrs
Cycles/Charge: 200

General Installation Notes:

- 1) The ML-350BC motor is a 3Nm battery motor. Designed with an on-board Li-ion battery, this motor is maintained by a low current trickle charge which is to be provided by a small plug-in charger.
- 2) The plug-in charger can be set up to permanently charge the battery, or only be plugged in for a few hours every 6-12 months, or as motor use levels require.
- 3) The ML-350BC is set up for wireless wall mounted and hand-held remote options but also has wired Dry Contact capabilities allowing for a 3rd party system integration. The ML-350BC produces less than 40bDA, powers shades on 2" tubes, and can accommodate a minimum shade width of 31".

ROLLER SHADE OPERATION
See Attached Roller Shade Switch /
Remote Option Sheet for Control Availability

ML-350BC Battery Operated Motor w/ RF Control Inside Mounted Dual Roller Shade Wiring Diagram

Scale: NTS

By: MJW


Date:

10/15/19
Rev: 01/01/22

CONFIDENTIAL -
All materials disclosed in this document are proprietary to Fabtex, Inc. The holder agrees to maintain it in confidence and must not replicate or reveal this information in any manner.




PRODUCT DISCLAIMER - Fabtex is a manufacturer of commercial products that require installation by a licensed contractor. All information shown is for schematic purposes and to aid coordination amongst trades. All wiring, connections, means and methods is to be performed by others in strict adherence with all federal, state, and local building codes.

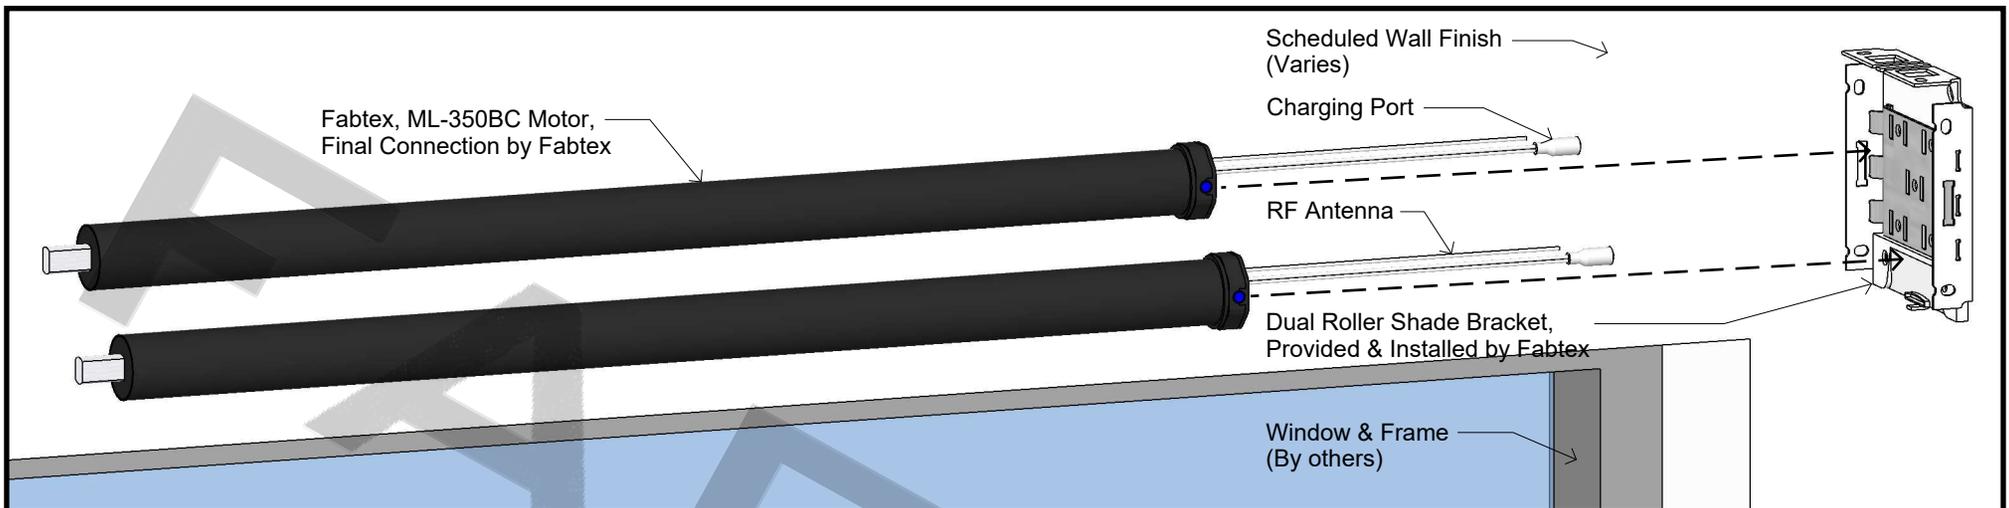

Battery Operated Dual Roller Shade

Scale: NTS

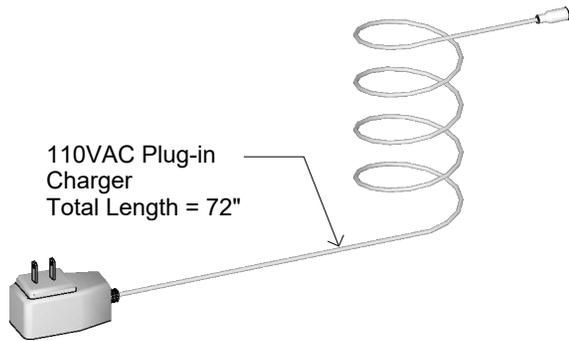

Plug-In Wall Charger (ML-212)

Scale: NTS

ML-350BC Motor
12VDC
3Nm Torque
28 RPM
2600mAh
26 Watts
Charge Time: 6 Hrs
Cycles/Charge: 200

General Installation Notes:

- 1) The ML-350BC motor is a 3Nm battery motor. Designed with an on-board Li-ion battery, this motor is maintained by a low current trickle charge which is to be provided by a small plug-in charger.
- 2) The plug-in charger can be set up to permanently charge the battery, or only be plugged in for a few hours every 6-12 months, or as motor use levels require.
- 3) The ML-350BC is set up for wireless wall mounted and hand-held remote options but also has wired Dry Contact capabilities allowing for a 3rd party system integration. The ML-350BC produces less than 40bDA, powers shades on 2" tubes, and can accommodate a minimum shade width of 31".

ROLLER SHADE OPERATION
See Attached Roller Shade Switch / Remote Option Sheet for Control Availability

ML-350BC Battery Operated Motor w/ RF Control Outside Mounted Dual Roller Shade Wiring Diagram

Scale: NTS

By: MJW


Date:

10/15/19
Rev: 01/01/22

CONFIDENTIAL -
All materials disclosed in this document are proprietary to Fabtex, Inc. The holder agrees to maintain it in confidence and must not replicate or reveal this information in any manner.




PRODUCT DISCLAIMER - Fabtex is a manufacturer of commercial products that require installation by a licensed contractor. All information shown is for schematic purposes and to aid coordination amongst trades. All wiring, connections, means and methods is to be performed by others in strict adherence with all federal, state, and local building codes.

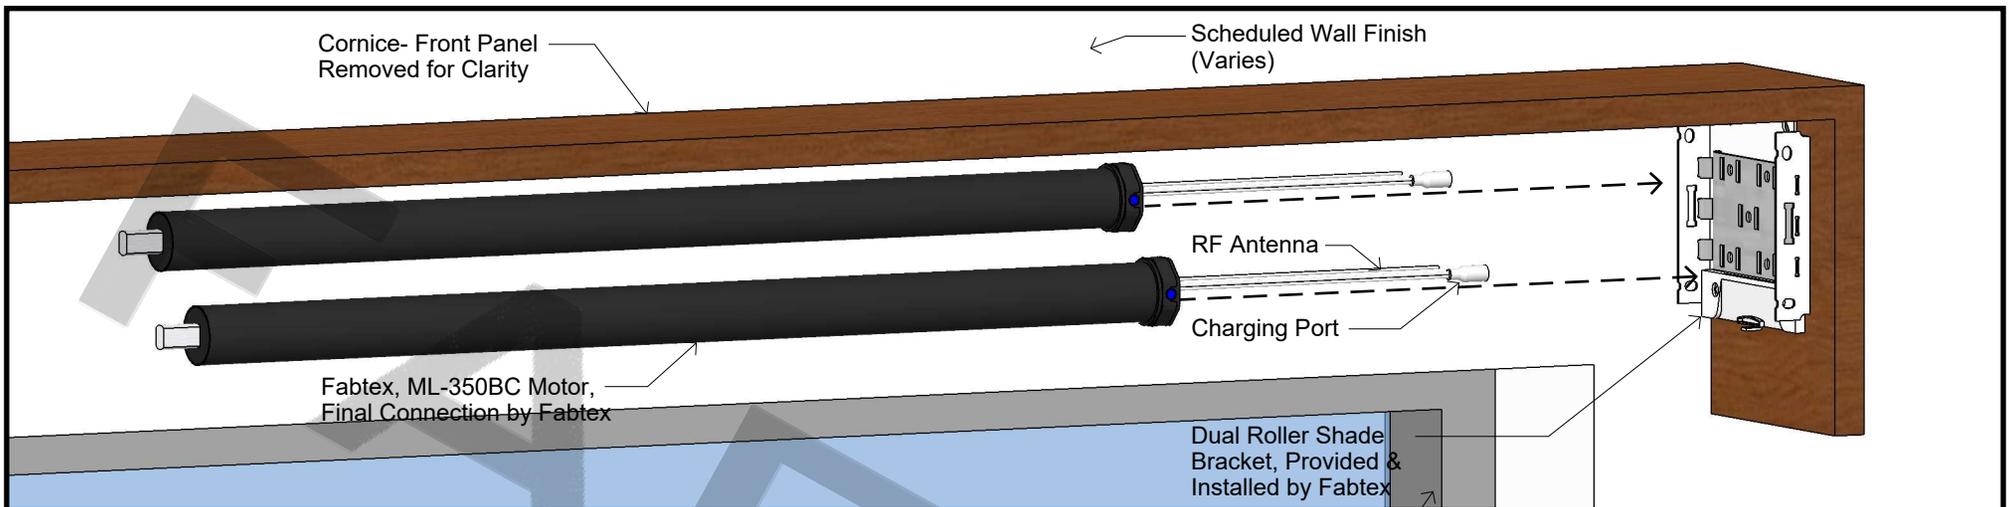

Battery Operated Dual Roller Shades

Scale: NTS

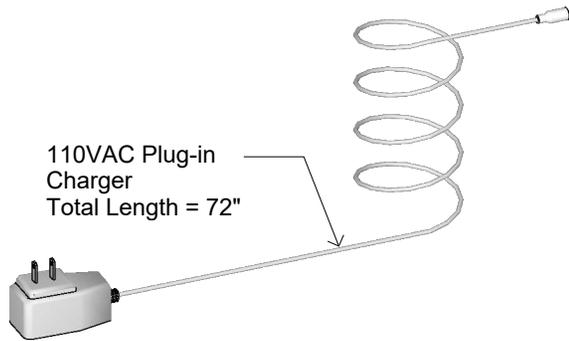

Plug-In Wall Charger (ML-212)

Scale: NTS

ML-350BC Motor
12VDC
3Nm Torque
28 RPM
2600mAh
26 Watts
Charge Time: 6 Hrs
Cycles/Charge: 200

General Installation Notes:

- 1) The ML-350BC motor is a 3Nm battery motor. Designed with an on-board Li-ion battery, this motor is maintained by a low current trickle charge which is to be provided by a small plug-in charger.
- 2) The plug-in charger can be set up to permanently charge the battery, or only be plugged in for a few hours every 6-12 months, or as motor use levels require.
- 3) The ML-350BC is set up for wireless wall mounted and hand-held remote options but also has wired Dry Contact capabilities allowing for a 3rd party system integration. The ML-350BC produces less than 40bDA, powers shades on 2" tubes, and can accommodate a minimum shade width of 31".

ROLLER SHADE OPERATION
See Attached Roller Shade Switch / Remote Option Sheet for Control Availability

ML-350BC Battery Operated Motor w/ RF Control Dual Roller Shade into Cornice Wiring Diagram

Scale: NTS

By: MJW

Date:

10/15/19
Rev: 01/01/22

CONFIDENTIAL -
All materials disclosed in this document are proprietary to Fabtex, Inc. The holder agrees to maintain it in confidence and must not replicate or reveal this information in any manner.



PRODUCT DISCLAIMER - Fabtex is a manufacturer of commercial products that require installation by a licensed contractor. All information shown is for schematic purposes and to aid coordination amongst trades. All wiring, connections, means and methods is to be performed by others in strict adherence with all federal, state, and local building codes.