

REQUIRES - Plug-in - Standard 120VAC Receptacle provided & installed by EC/GC; Hardwired - Standard 120 VAC power supply (provided & installed by EC/GC) when used in conjunction with RF Controls.

CONTROLS AVAILABLE - Radio Frequency (RF) Controls available (Recessed, Surface Mounted, or Handheld).

TUBE SIZE - Compatible with 2" Diameter Tube (Standard Crown & Drive). Also compatible with 2-1/2" Diameter Tube (Requires Larger Crown & Drive).

ML-350F Motor

120VAC @ 60Hz

6Nm Torque


33 RPM

0.85 Amps

102 Watts

Max. Whip Length:
8 Meters (312")
4 Meters (156")
2 Meters (78")

Plug-In Motor (ML-350F)

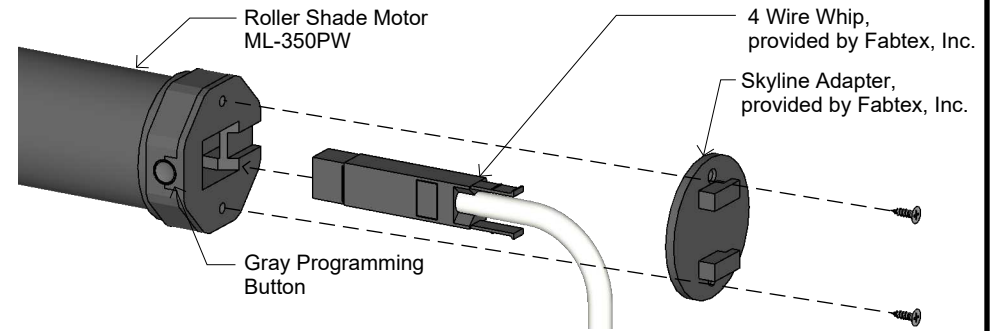

REQUIRES - Standard 120VAC power supply provided & installed by EC/GC (all connections) , must be hardwired. Wiring diagram must be provided by Fabtex, Inc. to customer.

CONTROLS AVAILABLE - Levitron #5657 Rocker Switch (Recessed) to be provided & installed by EC/GC (or equal).

TUBE SIZE - Compatible with 2" Diameter Tube (Standard Crown & Drive). Also compatible with 2-1/2" Diameter Tube (Requires Larger Crown & Drive).

ML-350PW Motor

120VAC @ 60Hz

6Nm Torque

33 RPM

0.97 Amps

113 Watts

Max. Whip Length:
8 Meters (312")
4 Meters (156")
2 Meters (78")

Std. Motor (ML-350PW)

**Motorized Roller Shade
Motor Options**

PRODUCT DISCLAIMER - Fabtex is a manufacturer of commercial products that require installation by a licensed contractor. All information shown is for schematic purposes and to aid coordination amongst trades. All wiring, connections, means and methods is to be performed by others in strict adherence with all federal, state, and local building codes.

Date:


Rev: 01/01/22
11/01/19

Scale: NTS

By: MJW

CONFIDENTIAL - All materials disclosed in this document are proprietary to Fabtex, Inc. The holder agrees to maintain it in confidence and must not replicate or reveal this information in any manner.



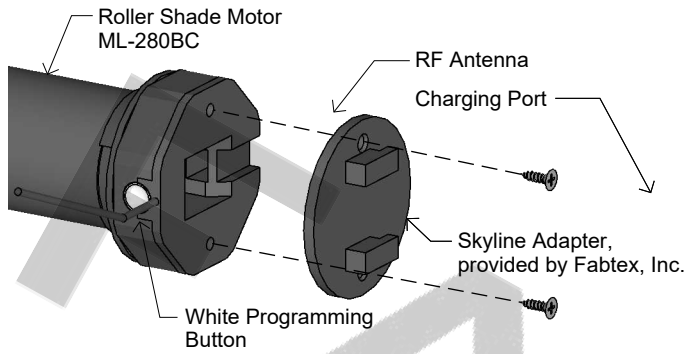


REQUIRES - Plug-in recharger (provided by Fabtex, Inc.)

CONTROLS AVAILABLE - Radio Frequency (RF) Controls available (Recessed, Surface Mounted, or Handheld).

TUBE SIZE - Only Compatible with 1-1/2" Diameter Tube.

Small Internal Battery Motor (ML-280BC)

ML-280BC Motor
12VDC
1.5Nm Torque
28 RPM
4000 mAh
20 Watts
Charge Time: 6 Hrs
Cycles/Charge: 600

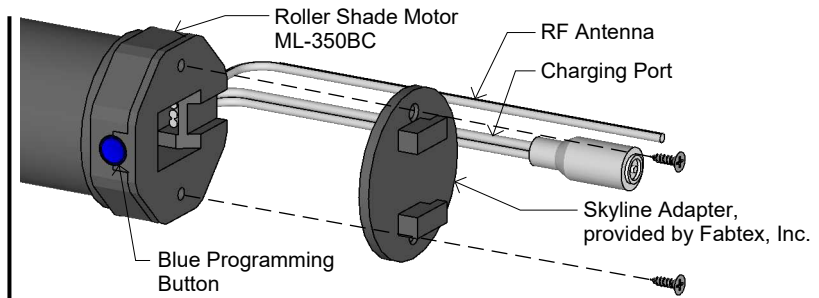


REQUIRES - Plug-in recharger (provided by Fabtex, Inc.)

CONTROLS AVAILABLE - Radio Frequency (RF) Controls available (Recessed, Surface Mounted, or Handheld).

TUBE SIZE - Compatible with 2" Diameter Tube (Standard Crown & Drive). Also compatible with 2-1/2" Diameter Tube (Requires Larger Crown & Drive).

Internal Battery Motor (ML-350BC)

ML-350BC Motor
12VDC
3Nm Torque
28 RPM
2600 mAh
26 Watts
Charge Time: 6 Hrs
Cycles/Charge: 600

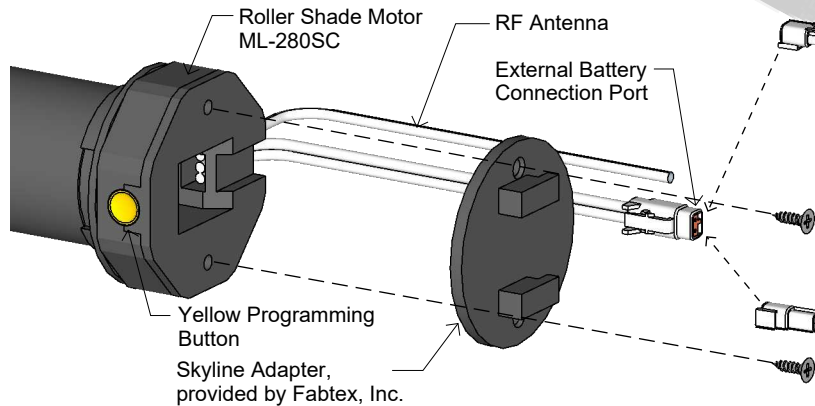


REQUIRES - External Battery ML-150P or ML-150T (provided by Fabtex, Inc.)

CONTROLS AVAILABLE - Radio Frequency (RF) Controls available (Recessed, Surface Mounted, or Handheld).

TUBE SIZE - Only Compatible with 1-1/2" Diameter Tube.

External Battery Motor (ML-280SC)

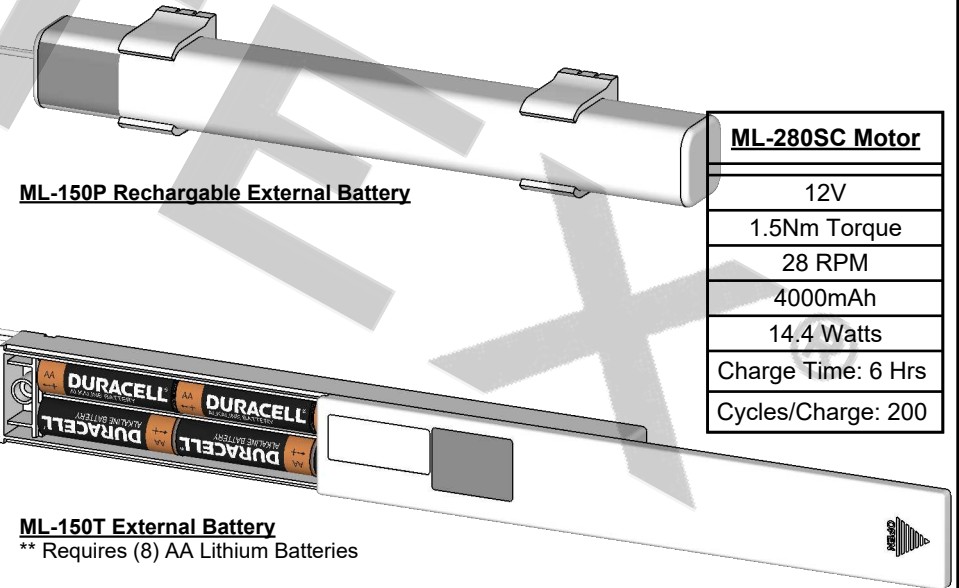

ML-280SC Motor
12V
1.5Nm Torque
28 RPM
4000mAh
14.4 Watts
Charge Time: 6 Hrs
Cycles/Charge: 200

ML-150T External Battery
** Requires (8) AA Lithium Batteries

Motorized Roller Shade Motor Options

PRODUCT DISCLAIMER - Fabtex is a manufacturer of commercial products that require installation by a licensed contractor. All information shown is for schematic purposes and to aid coordination amongst trades. All wiring, connections, means and methods is to be performed by others in strict adherence with all federal, state, and local building codes.

Date:
Rev: 01/01/22
11/01/19
Scale: NTS
By: MJW

CONFIDENTIAL - All materials disclosed in this document are proprietary to Fabtex, Inc. The holder agrees to maintain it in confidence and must not replicate or reveal this information in any manner.

